

Benchmark II SPP290-320P60

290-320W MWT Module

Poly 60 Cells

19.7%

Module efficiency up to 19.7%

MWT Solar Cell

- New cell structure and different manufacturing process.
- No bus-bar on the front. 3% less shadow and better use of sunlight.
- Effectively avoid the micro crack caused by the pressure between cell edge and ribbon.
- Compatible with other cell types including PERC, HIT, Black Silicon etc.

Insured by PICC and LLOYD'S

PICC **LLOYD'S**

Comprehensive Qualifications & Certifications

- ★ IEC 61215, IEC 61730, IEC 61701, IEC 62716, IEC 60068-2-68.
- ★ CQC&CGC Top Runner Advanced Technology Certification (4A class)
- ★ ISO 9001: 2015 Quality Management System
- ★ ISO 14001: 2015 Environment Management System
- ★ OHSAS 18001: 2007 Occupation Health Safety Management System
- ★ TUV NORD and UK NQA Quality System Certification



Benchmark MWT PV Module



Higher Efficiency

The highest efficiency of the series is up to 19.7%.



Higher Yield

Higher power generation on the same installation.



Lower Degradation

At least 96% of the initial effective output at the 1st year and 80.2% at the 30th year.



Heat-Resistant

Remain peak performance in hot days thanks to the improved temperature coefficient as low as $-0.36\%/^{\circ}\text{C}$.



Corrosion-Resistant


Certified for Ammonia Resistance and Salt Mist Corrosion to maximum severity level 6.



Anti-PID

Certified for Anti-PID under $85^{\circ}\text{C}/85\%\text{RH}$, for 288hrs.

30 Years Performance Warranty

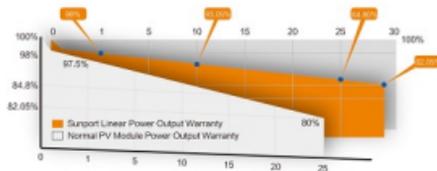

Electrical Characteristics at Standard Test Conditions(STC)

Spec/Model	Unit	SPP290P60	SPP295P60	SPP300P60	SPP305P60	SPP310P60	SPP315P60	SPP320P60
Max-Power(Pm)	W	290	295	300	305	310	315	320
Power Tolerance	%				0~+3%			
Max-Power Voltage(Vm)	V	31.2	31.4	31.6	31.8	32.0	32.2	32.4
Max-Power Current(I _m)	A	9.30	9.40	9.50	9.60	9.69	9.79	9.88
Open-Circuit Voltage(Voc)	V	38.6	38.8	39.0	39.2	39.4	39.6	39.8
Short-Circuit Current(I _{sc})	A	9.82	9.90	9.98	10.06	10.14	10.22	10.30
Module Efficiency(η _m)	%	17.8	18.1	18.4	18.7	19.1	19.4	19.7

STC:AM=1.5, Irradiation 1000W/m², Module Temperature 25°C

Electrical Characteristics at Nominal Module Operating Temperature (NMOT)

Spec/Model	Unit	SPP290P60	SPP295P60	SPP300P60	SPP305P60	SPP310P60	SPP315P60	SPP320P60
Max-Power(Pm)	W	216	220	224	228	232	236	240
Max-Power Voltage(Vm)	V	28.5	28.7	28.9	29.1	29.3	29.5	29.7
Max-Power Current(I _m)	A	7.58	7.67	7.76	7.84	7.93	8.01	8.09
Open-Circuit Voltage(Voc)	V	35.6	35.7	35.8	35.9	36.0	36.1	36.2
Short-Circuit Current(I _{sc})	A	7.99	8.07	8.15	8.23	8.31	8.39	8.47

NMOT: Irradiation 800W/m², ambient temperature 20°C, Wind Speed 1m/s

Temperature Coefficient

Nominal Operating Cell Temperature	43±2°C
Temperature coefficient of P _{max}	-0.36%/°C
Temperature coefficient of Voc	-0.28%/°C
Temperature coefficient of I _{sc}	0.06%/°C

Package


Container Size	Quantity (pcs)	Quantity (palette)
20' GP	360	12
40' GP	840	28
40' HC	840	28

Mechanical Property


Dimension(L × W × H)	1640mm×992mm×35mm
Weight	18.5kg
Glass Type	High Transmittance Anti-reflective Coated Tempered Glass 3.2mm
Solar Cell	60(10x6)/Poly 6inches
Encapsulant	EVA
Frame	Anodized Aluminum Alloy / Silver
Junction Box	IP65 & IP67
Cable	1000mm / 4mm ²
Connector	MC4 Compatible

I-V Curve


I-V Curve at different irradiation (SPP305P60)

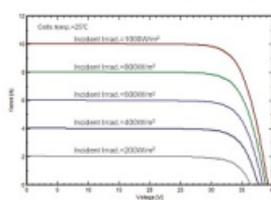

I-V Curve at different temperature (SPP305P60)

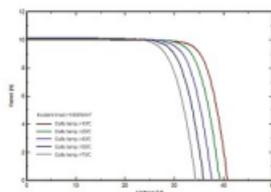

Module Size

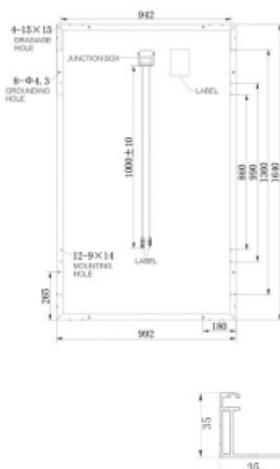

Operating Conditions

Max System Voltage	DC1000V(TUV)
Max Fuse Rated Current	15A
Operating Temperature Range	-40°C ~ +85°C
Mechanical Load	5400Pa(2400Pa)
Max Allowable Hail Load	φ25mm hail, from 1m of distance at 23 m/s
Application Class	Class A

